

REPLACING A LOCK

***For carts equipped with KV 8400 slides for top drawer**

1. Remove the top drawers
2. Pull the top slide forward about an inch to expose the screw that is holding in the slide. Remove the screw.



3. Drop slide down to expose the lock assembly.



***For carts equipped with KV 8450 soft close slides for top drawer**

1. Remove the top drawers
2. Pull the top slide forward about an inch to expose the screw that is holding in the slide. Remove the screw.




3. Pull the slide towards the front of the cart to remove it from the back bracket.




4. Push lock in to expose the screw in the back of the lock. Remove the screw.



5. Insert the key into the lock and turn into the unlocked position and pull out of the cabinet. If you do not have the key, reach in and push down on the brass locking bolt so it will pass through the faceplate.

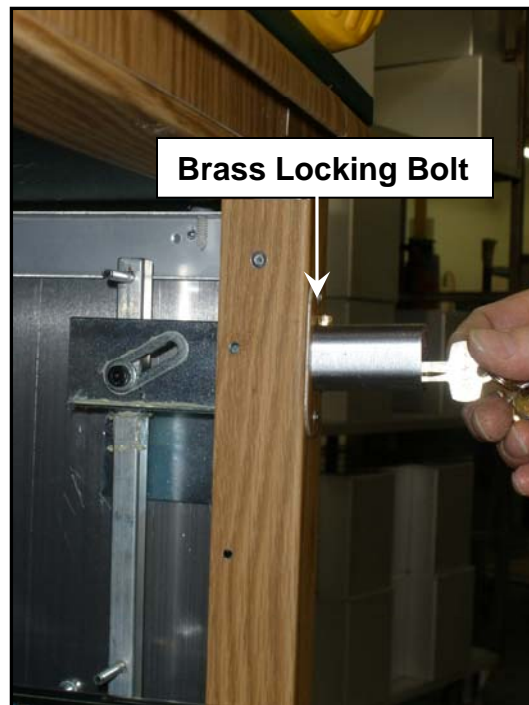

6. Insert the lock into the front of the cabinet by turning the key into the unlocked position. Line up the lock with the hole on the actuator plate and attach with the phillips head screw.

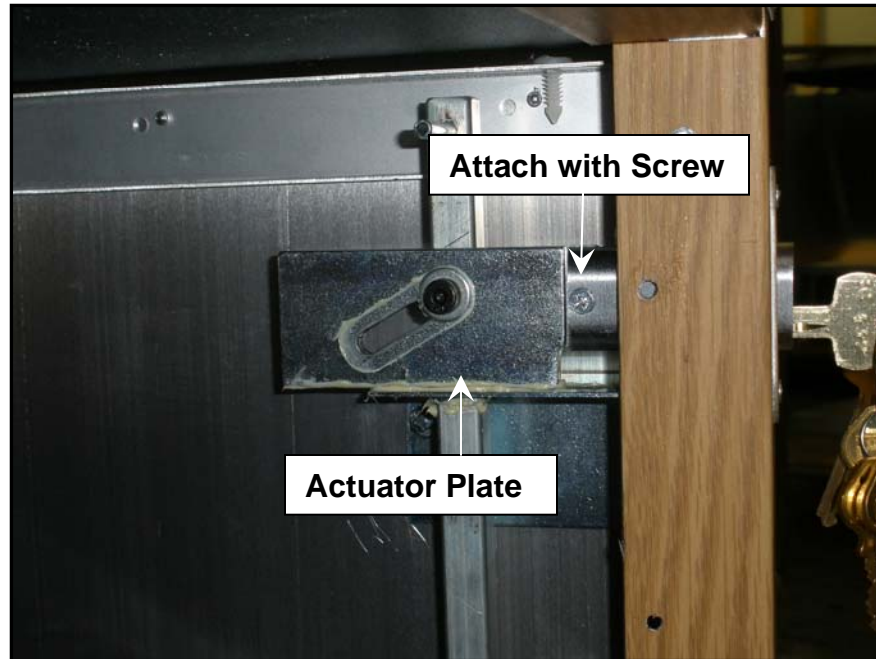

7. Reposition the slide back into place and re-attach with phillips screw



8. Re-Insert Drawers